


Article name: **CORD CONTROL STA (stationary)**
Article no.: **CC0350.XXXX**

Steel Cord Monitoring System

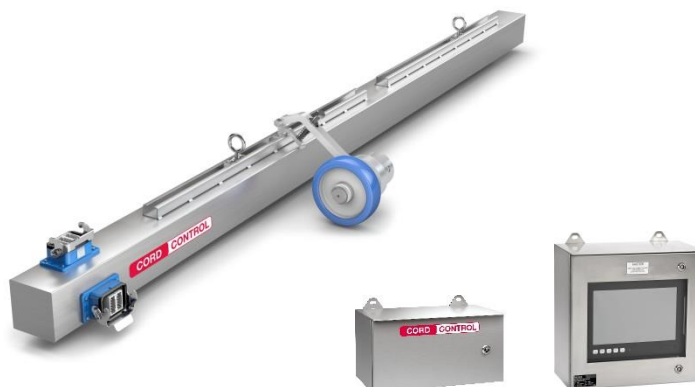

Technical Data

Power supply voltage	100 - 240 VAC 140 - 300 VDC
Power supply current	0.7 – 0.5 A
Frequency (AC)	50 / 60 HZ
Temperature range [°C]	0 – 40
Temperature range [°F]	32 – 104
Degree of protection	IP 67, NEMA 4X
Connections	Power USB, Ethernet (RJ45)

Dimensions

	Length	Width	Height
STA1200	1452 mm 57.17 in	400 mm 15.75 in	200 mm 7.87 in
STA1600	1837 mm 72.32 in	400 mm 15.75 in	200 mm 7.87 in
STA2000	2221 mm 87.44 in	400 mm 15.75 in	200 mm 7.87 in
STA2400	2605 mm 102.56 in	400 mm 15.75 in	200 mm 7.87 in

Outputs

Output	Terminal	Function
1	X12.1.11	temperature to low
	X12.1.14	
2	X12.2.11	temperature to high
	X12.2.14	
3	X12.3.11	improper voltage
	X12.3.14	
4	X12.4.11	improper speed
	X12.4.14	
5	X12.5.11	operation mode (online)
	X12.5.14	
6	X12.6.11	detection mode (analysis in progress)
	X12.6.14	
7	X12.7.11	belt warning 1
	X12.7.14	
8	X12.8.11	belt warning 2
	X12.8.14	

Inputs

Input	Terminal	Function
1	X11.1.11	nominal belt speed
	X11.1.14	